


SovereignRE is an in-register click-down system with a larger bevel that is ideal for residential and commercial use.

This range uses our IXPE pad that offers a quiet, solid step underfoot. The unique micro closed-cell technology offers a waterproof backing that is mold and mildew resistant.

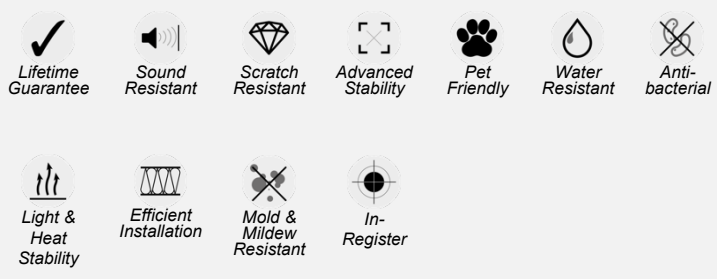

Plank: 1520mm x 228mm

6.5 mm total gauge
0.7 mm wear layer
Angle drop lock
1.5 mm IXPE acoustic insulation layer
Colour matched wide bevel
PU-coating
Bevelled edge
100% recyclable

PER CARTON 7 Planks 2.43m²

| | STANDARD | SOVEREIGN ^{RE} |
|-------------------------|--|--|
| SIZE | | 1520mmx228mm |
| THICKNESS | ISO24346 | 6.5mm |
| WEAR LAYER | ISO24340 | 0.7mm |
| QUANTITY PER CARTON | | 7 pcs |
| COVER AREA PER CARTON | | 2.43m ² |
| GUARANTEE | Light industrial Commercial Domestic | 25 years 25 years Lifetime Warranty |
| STANDARDS | ISO/DIS19322.2:2016 EN649 | Heterogeneous PVC |
| CLASSIFICATION | ISO 10874 Commercial ISO 10874 Domestic EN 685- Light industrial EN 685- Commercial EN 685- Domestic | 41: Light industrial 33: Heavy Commercial 23: Domestic heavy |
| INFLAMMABILITY | EN 13501-1 EN ISO 9239-1 EN ISO 11925-2 | B _{fl} -s1 |
| STAINING RESISTANCE | EN ISO 26987:2012 | Class 0 |
| COLOUR FASTNESS | EN ISO 105-B02 | Grade 6 |
| FUNGI RESISTANCE | ISO846 | Growth intensity 0 |
| DIMENSIONAL STABILITY | EN ISO 23999 | ≤0.15% |
| ACOUSTIC INSULATION | EN ISO 10140-3 ISO717-2 | ΔLw 22DB |
| RESIDUAL INDENTATION | EN 433 | < 0.1mm |
| CASTOR CHAIR | ISO 4918 EN 425:2002 | Pass |
| FORMALDEHYDE EMISSION | EN14041:2004 | Class E1 |
| SLIP RESISTANCE | EN 13893 DIN 51130 | DS R10 |
| ELECTROSTATIC BEHAVIOUR | EN1815 | Pass |
| REACH | EC No 1907/2006 | Pass |
| VOC EMISSION | France VOC regulation | A+ |

For more information and warranties on **SovereignRE** and our other ranges, please consult our website at adorefloors.eu.

