


Monarch click-down system is perfect for residential and light commercial use.

The range is well suited for homes due to its superior scratch/wear/scuff/stain resistance due to its 0.3mm wear layer.

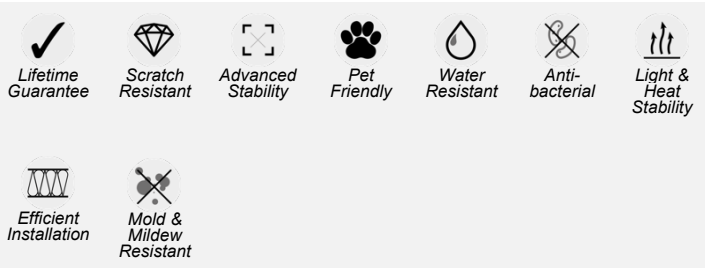

Plank: 1220mm x 181mm
Tile: 610mm x 305 mm

3.5 mm total gauge
0.3 mm wear layer
Adore lock system
4 sided micro bevel
PU-coating
100% recyclable

PER CARTON 16 Planks 3.53m²
18 Tiles 3.35m²

	STANDARD	MONARCH	
SIZE		1220mmx181mm	305mmx610mm
THICKNESS	ISO24346	3.5mm	3.5mm
WEAR LAYER	ISO24340	0.3mm	0.3mm
QUANTITY PER CARTON		16 pcs	8 pcs
COVER AREA PER CARTON		3.53m ²	3.35m ²
GUARANTEE	Light industrial Commercial Domestic	Lifetime Warranty Heterogeneous PVC	Lifetime Warranty Heterogeneous PVC
STANDARDS	ISO/DIS19322.2:2016 EN649		
CLASSIFICATION	ISO 10874 Commercial ISO 10874 Domestic EN 685- Light industrial EN 685- Commercial EN 685- Domestic	23: Domestic heavy	23: Domestic heavy
INFLAMMABILITY	EN 13501-1 EN ISO 9239-1 EN ISO 11925-2	B _{fl} -s1	B _{fl} -s1
STAINING RESISTANCE	EN ISO 26987:2012	Class 0	Class 0
COLOUR FASTNESS	EN ISO 105-B02	Grade 6	Grade 6
FUNGI RESISTANCE	ISO846	Growth intensity 0	Growth intensity 0
DIMENSIONAL STABILITY	EN ISO 23999	≤0.15%	≤0.15%
ACOUSTIC INSULATION	EN ISO 10140-3 ISO717-2	ΔLw 20DB	ΔLw 20DB
RESIDUAL INDENTATION	EN 433	< 0.1mm	< 0.1mm
CASTOR CHAIR	ISO 4918 EN 425:2002	Pass	Pass
FORMALDEHYDE EMISSION	EN14041:2004	Class E1	Class E1
SLIP RESISTANCE	EN 13893 DIN 51130	DS R10	DS R10
ELECTROSTATIC BEHAVIOUR	EN1815	Pass	Pass
REACH	EC No 1907/2006	Pass	Pass
VOC EMISSION	France VOC regulation	A+	A+

For more information and warranties on **Monarch** and our other ranges, please consult our website at adorefloors.eu.

